TECHNICAL DATASHEET

400W Medical ATX Power Supply

PE series

FEATURES

- Flex size with 190 x 82 x 41 mm
- IEC 60601-1 & IEC 62368-1 certified
- Intel ATX12V V3.0 compliance
- Meet EN55011 Class B
- BF class isolation

SAFETY STANDARD APPROVAL

E211696

Please check certificate schedule before design

DESCRIPTION

This PSU of AC/DC switching power supplies in an Flex form factor 190 × 82 × 41 mm is capable of delivering 300 or 400 watts of continuous power. PSU built-in DC/DC converter at +3.3V and +5V output rails to enhance load regulation.

INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	47-63 Hz
Input current:	6 A (rms) @115Vac, 60Hz 3 A (rms) @ 230Vac, 50Hz
Earth leakage current:	400 μA max. @ 264 VAC, 63 Hz
Touch current:	100 μA max. @ 264 VAC, 63 Hz

OUTPUT SPECIFICATIONS

Output voltage/current:	See rating chart.
Maximum output power:	See rating chart.
Ripple and noise:	See rating chart.
Protection	
OVP:	Latch off
OCP & Shorted:	Auto recovery
OTP:	Latch off

ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	0℃ to +50℃
Storage temperature:	-20℃ to +80℃
Relative humidity:	10% to 95% non-condensing
Derating:	Derate from 100% at +50℃ linearly to 50% at +70℃

GENERAL SPECIFICATIONS

Turn-on delay time:	2 Sec maxi.
Power factor:	0.95 minimum at 115VAC 0.9 minimum at 230VAC
Efficiency:	FSP300M-50PE meet 80PLUS Gold (87%, 90%, 87%) at +3.3 V & +5 V combine output power 80W FSP400M-50PE meet 80PLUS Gold (87%, 90%, 87%) at +3.3 V & +5 V combine output power 90W
Hold-up time:	10 mS minimum at 115VAC 10 mS minimum at 230 VAC
Line regulation:	±1% maximum at full load
Inrush current:	50 A @115 VAC at 25℃ cold start 100 A @ 230 VAC at 25℃ cold start
Withstand voltage:	4000 VAC from input to output (2 MOPP) 1500 VAC from input to ground (1 MOPP) 1500 VAC from output to ground
EMC Performance (IEC60601-1-2)	
EN55011/ EN55022:	Class B conducted, Class B radiated
EN61000-3-2:	Harmonic distortion, Class D
EN61000-3-3:	Line flicker
EN61000-4-2:	ESD, ±15 KV air and ±8 KV contact
EN61000-4-3:	Radiated immunity, 9-28 V/m
EN61000-4-4:	Fast transient/burst, ±2 KV
EN61000-4-5:	Surge, ±1 KV diff., ±2 KV com.
EN61000-4-6:	Conducted immunity, 3-6 Vrms
EN61000-4-8:	Magnetic field immunity, 30 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms, >100% reduction for 10 ms

© 2024 FSP Group. All Rights Reserved. All trademarks are registered to their respective owners.

OUTPUT VOLTAGE/CURRENT RATING CHART

Rating / Outputs	FSP400M-50PE		FSP300M-50PE		Load Regulation	Ripple & Noise
	Mini. Load	Maxi. Load	Mini. Load	Maxi. Load		
+3.3 V	0 A	14 A	0 A	12 A	±5%	50 mV P-P
+ 5 V	0 A	16 A	0 A	14 A	±5%	50 mV P-P
+12 V1	0 A	33 A	0 A	24 A	±5%	120 mV P-P
-12 V	0 A	0.3 A	0 A	0.3 A	±10%	120 mV P-P
+5 Vsb	0 A	3.0 A	0 A	2.5 A	±5%	50 mV P-P
+3.3 V & +5 V Combine Output Power	130W Maxi.		120W Maxi.			
+12V Total Output Power	396W Maxi.		288 A Maxi.			
Total Output Power	400W		300W			

NOTES:
1. -5V is not for standard model but upon request.
2. Ripple and noise measurements shall be made under all specified load conditions through a single pole low pass filter with 20MHz cutoff frequency. Outputs shall bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Power Excursion

Based on the power budgets and peak power of both the Processor detailed and the PCIe* Add-in Cards, the following Peak Power Requirements are defined for the Power Supply.

Power Excursion % of PSU Rated Size	Time for Power Excursion (TE)	Testing Duty Cycle	Time Constant (TC)
100%	Infinite		
110%	100ms	25%	300ms
135%	10ms	12.5%	70ms
145%	1ms	8%	11.5ms
150%	100us	5%	1900us

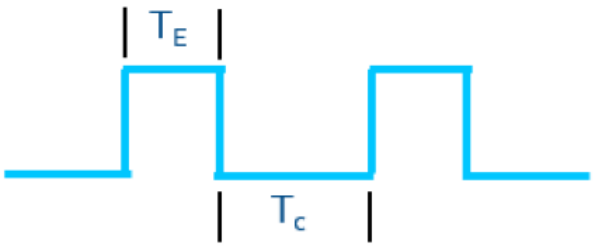

© 2024 FSP Group. All Rights Reserved. All trademarks are registered to their respective owners.

INTERFACE SIGNALS

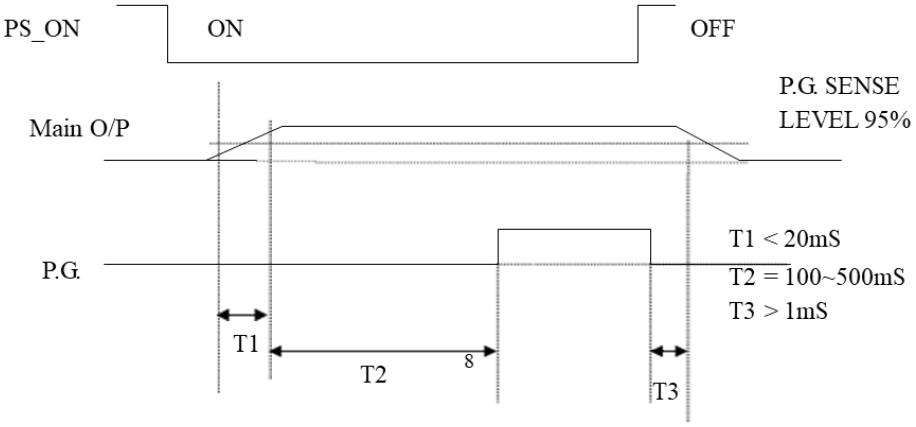

1. T1 : RISE TIME < 20 mS
2. T2 : POWER GOOD DELAY TIME 100 ~ 500 mS
3. T3 : POWER FAIL DELAY TIME > 1 mS

© 2024 FSP Group. All Rights Reserved. All trademarks are registered to their respective owners.

400W Medical ATX Power Supply

MECHANICAL SPECIFICATIONS

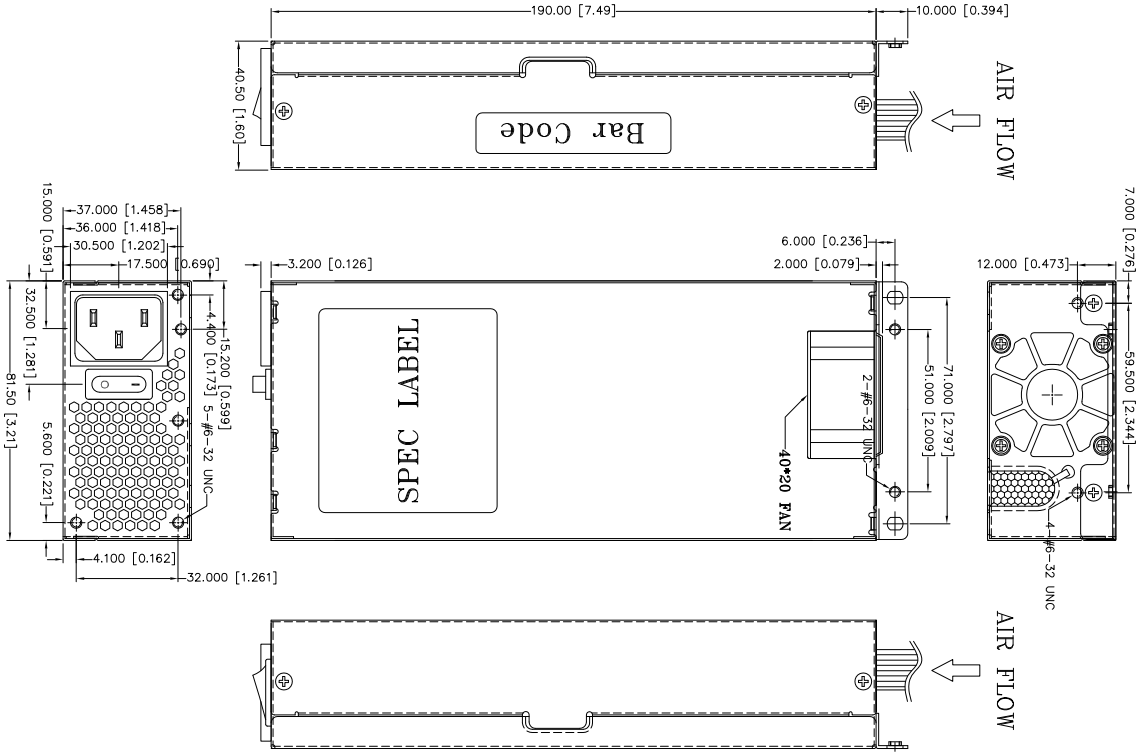

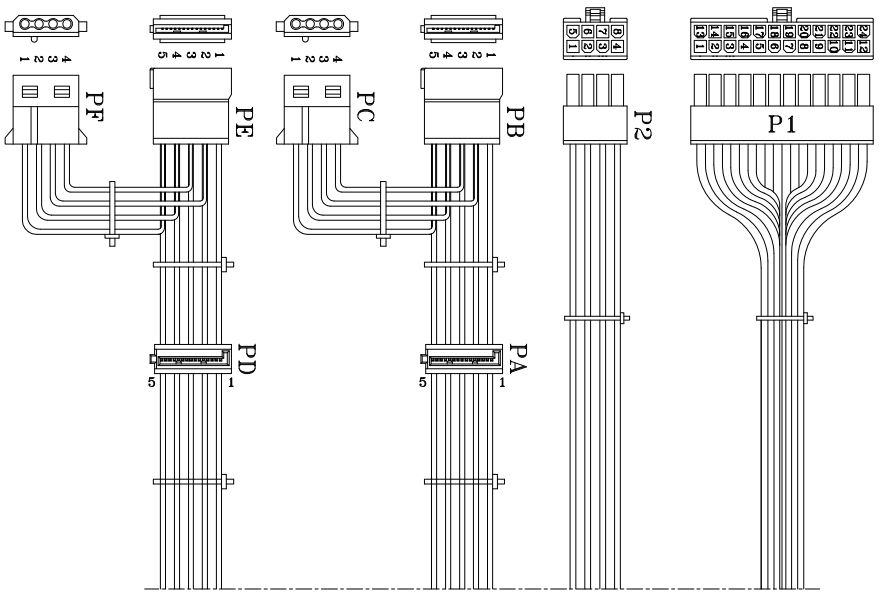

Output connectors	Connector ID.	Cable Length	Output connectors (equivalent)
Mother board 24 pin	P1	350 mm	MOLEX 39-01-2240
CPU 8 pin	P2	350 mm	MOLEX 39-01-2080
SATA + PATA	PA + PB + PC PD + PE + PF	(350+155+155 mm) * 2	MOLEX SD-67926-0311 MOLEX SD-67582-001 WST P4-A10202

Weight: 0.93 Kg

© 2024 FSP Group. All Rights Reserved. All trademarks are registered to their respective owners.